

### Features:

- pre-assembled ready for connection - easy installation
- polypropylene container with 20 litres capacity and up to 10 litres switching volume
- switching device integrated in lid with audible high water alarm signal
- potential-free contact for external alarm or washing machine stop
- pump fixed on lid for easy cleaning and maintenance
- prepared shower inlet DN 50 usable on both sides (container bottom edge til middle of shower inlet only 80 mm)
- operation temperature 40°C (short-term 90°C)
- pressure outlet 1 1/4" FPT with integrated non-return valve
- active carbon filter for container ventilation
- protection grade IP 57 - temporary submersible

### Application:

- pumping of domestic waste water from washing machines, showers, washbasins etc.
- above-ground installation in frost-free rooms below the backflow level


### Scope of delivery:

- pre-assembled ready for connection with 1,5 m power cable and plug

### Technical data:

| Art.no. | U<br>[V] | P <sub>1</sub><br>[W] | P <sub>2</sub><br>[W] | I <sub>n</sub><br>[A] | n<br>[min-1] | Q <sub>max</sub><br>[m³/h] | H <sub>max</sub><br>[m] | SH<br>[mm] | PO     | L<br>[mm] | W<br>[mm] | H<br>[mm] | Weight<br>[kg] |
|---------|----------|-----------------------|-----------------------|-----------------------|--------------|----------------------------|-------------------------|------------|--------|-----------|-----------|-----------|----------------|
| 11468   | 230      | 850                   | 430                   | 3,7                   | 2800         | 11,5                       | 10,0                    | 10         | G 11/4 | 393       | 244       | 299       | 6              |

### Characteristics:

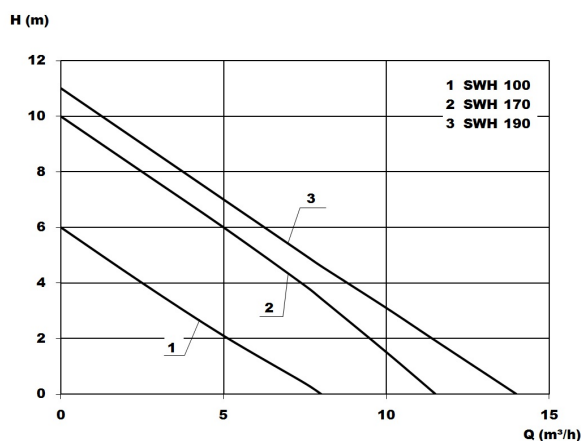

### Product benefits:

- ready for connection - pump and control unit already integrated
- integrated audible alarm
- double safety due to 2nd float (alarm float)
- all connections prepared; all connection pieces included in delivery
- pump fixed on lid for ease of maintenance

### Materials:

|                         |                                       |
|-------------------------|---------------------------------------|
| Material impeller:      | PA6 GV25                              |
| Seal motor:             | shaft seal NBR                        |
| Seal pump:              | mechanical seal<br>carbon/ceramic/NBR |
| Material motor housing: | stainless steel AISI 316L             |
| Material pump housing:  | PP GF20                               |
| Material motor shaft:   | stainless steel AISI 430F             |
| Material container:     | PP                                    |

**Dimensions:**

